

# ByteBus Settings


## Switch #SW2: Delay Times (seconds)

- Bit 1 } Sensor Validation Delay
- Bit 2 } Sensor Validation Delay
- Bit 3 } Actuator Override Delay
- Bit 4 } Actuator Override Delay

Sensor: Bit 1 & Bit 2 Actuator: Bit 3 & Bit 4	00	01	10	11
Sensor Validation Delay (sec)	1	4	7	10
Actuator Override Delay (sec)	5	15	25	35

Switch #SW2: Reset


Switch #SW4: Not used

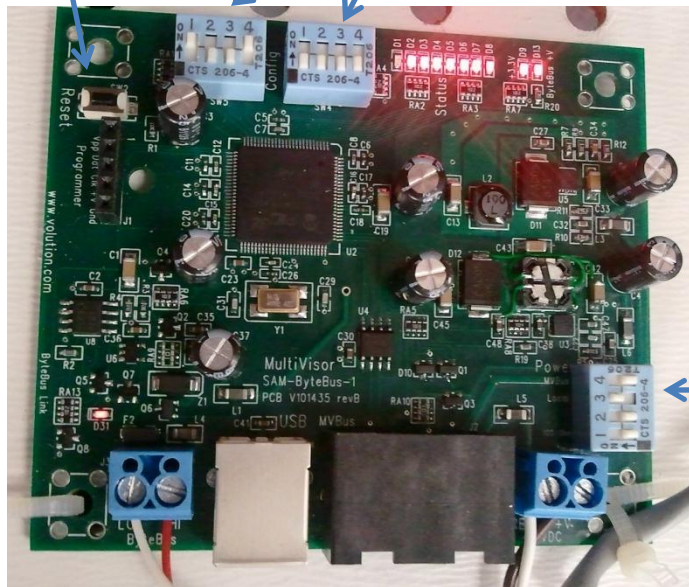

Switch #SW1: Power Source

- Bit 1 = OFF
- Bit 2 = OFF
- Bit 3 = ON
- Bit 4 = OFF

# Cabling Diagram

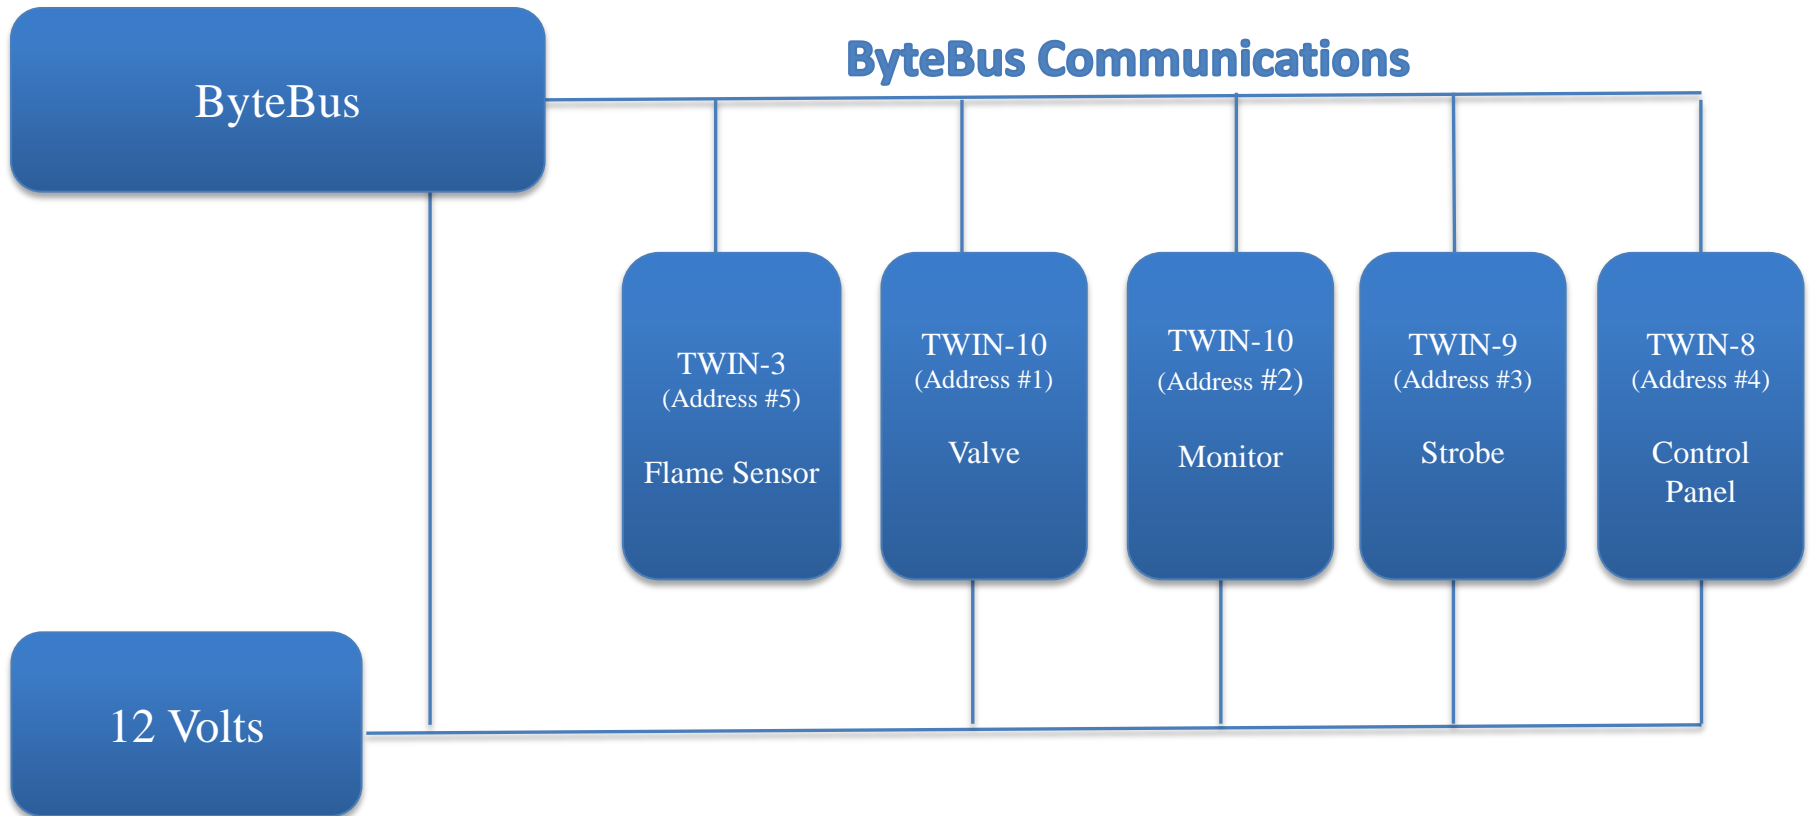

Specific TWIN wiring is given on Volution's website. Call for instructions.